


CODE: **AWO300 v1.9**
 NAME: **17/TRP80/DSPR**

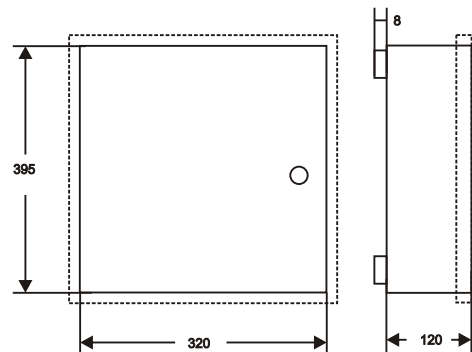

DESTINATION

DSC: PC1616, 1832, 1864, 4020 + 7x 5108 (4108, 5208, 5100, 4116)
 PC1616, 1832, 1864, 4020 + 2x (5204, 5400, 5200, 5580, 5008, 4216) + 5x (4108, 5108, 5208, 5100, 4116)

MODULES: 3x (PC5204, 5400, 5200, 5580, 5008, 4216) + 5x (5108, 4108, 5100, 4116, 5208)
 4204 + 7x (4108, 5108, 5100, 4116, 5208)

PARADOX: E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 4x ZX8 (APR3-ADM2, APR3- HUB2, PGM4)

RISCO: PRO24, 116, 128, 140+ RPO296EPS (RP128 3APS) + 3x EZ16 (E04, EZ8)

SATEL: CA4VI, CA5, CA6
 VERSA5, 10 15, CA10 + 4 x CA10E (CA64E, SM, MST1)
 INTEGRA24, 32 + 4x CA64E (SM)
 INTEGRA64, 128 + 3x CA64E (SM)

MODULES: CA64 (PP, EPS, ADR, O-R, O- ROC, O-OC, OPS- OC, OPS- R, OPS- ROC, VGM- 16, SR, PT SA)+ 4x CA64E (SM)

PYRONIX: MATRIX 424, 816, 832, 832+

TEXECOM: PREMIER 412, 816, 832, 48, 88, 168, 640 + COM30 (ISDN)

TELMOR: TCA- 824+ 2x (TEX800) + TMT1

ROGER: PR402, CPR 32- SE
 2x blacha KD (AWO432)

EBS: PX 202A

PULSAR: MS1512, MSR1512, MSR1512
 MS2512, MSR2512, MSR2512
 MSR1512

TECHNICAL DATA

| | |
|------------------------------------|---|
| Dimensions: | internal: W=320, H=395, D=120 external: W1=325, H1=400, D1=128mm [mm, +/-2] |
| Weight net/gross: | 4,20kg / 4,45kg [+/-0,1kg] |
| Battery space: | 17Ah/12V Sealed Lead Acid (SLA) |
| Transformer: | TRP 80VA/16V/18V/20V in the case of PC/ABS in class UL94-V0, IP20 |
| Power supply: | 230V/AC (-15%/+10%), 50Hz, 400mA (max.) |
| Power supply output: | U1=16V/AC or U2=18V/AC or U3=20V/AC (-5%, +15%), I1=5,0A or I2=4,5A or I3=4,0A (max.) |
| Operating environment: | class II , -10°C+ 40°C |
| Material description: | Sheet steel DC01, Thickness: 0,7mm, Protection anticorrosion, Color: RAL9003 |
| Destination: | indoor |
| Tamper protection: | 1 x microswitch: opening, 0,5A@50V/DC max. NC |
| Closing: | screwed x 4 |
| Notes: | optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal |
| Certification, declaration: | CE, RoHS |