



Protection modules

Fuse block

CODE:
NAME:


AWZ577, AWZ578, AWZ579, AWZ580 v.1.0
LB8/0,3A/PTC; LB8/0,5A/PTC;
LB8/1,0A/PTC; LB8/0,3-1,0A/FTA

EN

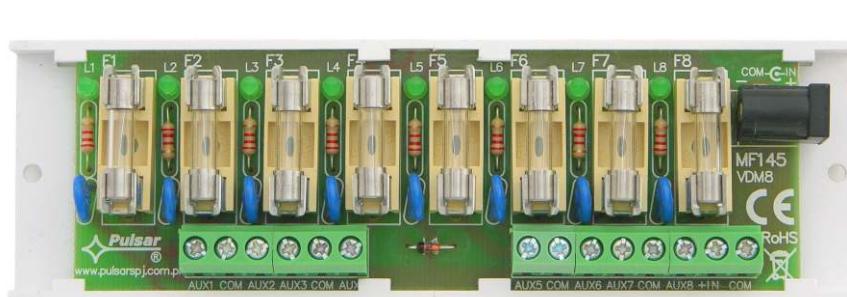

ACCESORIES :

[1] adapter: cable to DC 5,5/2,1 plug - code ML109

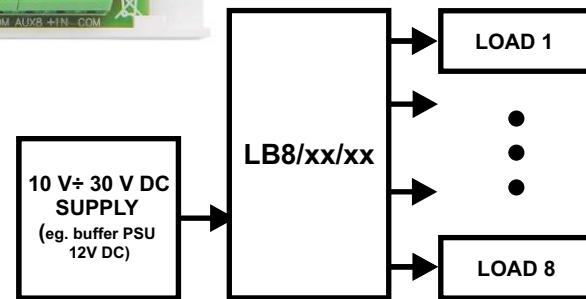

DESCRIPTION

The fuse block is used for power distribution in a low-voltage alarm systems (power distribution). The module has two supply inputs: the terminal block IN and the socket DC 5,5/2,1. The fuse block operating voltage is 10 V÷ 30 V DC. The module has eight independent outputs AUX1 ÷ AUX8. Depends of the module type, each output is protected against overload and short-circuit by the fuse or PTC polymeric fuse. Fuse failure or activation of the PTC fuse is signaled by the turning off the proper diode LED: L1 for AUX1 output etc. Additionally, each output is protected by the varistor securing the loads and power supply from the surges incoming from lines.

TECHNICAL DATA

	AWZ577 LB8/0,3A/PTC	AWZ578 LB8/0,5A/PTC	AWZ579 LB8/1,0A/PTC	AWZ580 LB8/0,3-1,0A/FTA
Casing	no, open frame design, IP00			
Dimensions	140 x 43 x 21 (WxHxD)			
Net / gross weight	0,044kg / 0,080kg			0,062kg / 0,113kg
Installation	installation tape or installation bolt x2			
Supply voltage	10 V÷ 30 V DC			
Output voltage	$U_{AUX} = U_{IN}$ (according to supply voltage)			
Number of inputs	2: złącze śrubowe IN oraz gniazdo DC 5,5/2,1			
Number of outputs	8			
Short-circuit protection (SCP) / Overload protection (OLP)	8 x 0,3A PTC	8 x 0,5A PTC	8 x 1,0A PTC	8 x F 0,3A lub 8 x F 0,5A lub 8 x F 1,0A
Supervoltage protection	8 x varistors			
Optcal signalling of operation	LEDs: L1 ÷ L8- status of outputs AUX1 ÷ AUX8			
Operating conditions	2nd environmental class, -10°C÷ 50°C			
Certyficates, declaration	CE, RoHS			
Remarks	Outputs: connectors f 0,41÷1,63 (AWG 26-14)			