


BCS-TIP3200IR-E-IV




2 Mpx mini bullet camera with IR

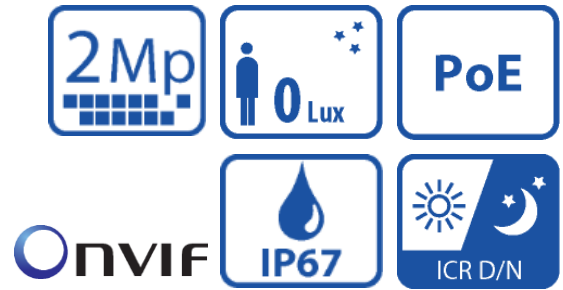

Key features

- Sensor 1/3" 2Mpx PS CMOS
- Compression H.265 / H.264 / MJPEG
- Dual stream coding
- 25fps @2Mpx(1920x1080)
- IR cut filter with auto-switch
- Digital Noise Reduction 3DNR
- Functions BLC, HLC, D-WDR, AGC, AWB, ROI
- Built-in web service, support BCS-NVR, CMS(BCS Manager), mobile app(iOS, android), P2P
- Fixed lens 2.8mm F2.0
- IR up to 30m
- Metal outside casing with protection IP67
- Power supply DC12V / PoE

Dimensions

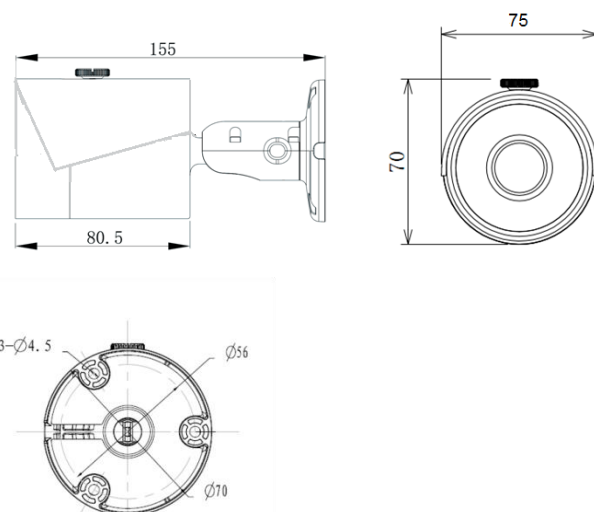

Specification

Model		BCS-TIP3200IR-E-IV
Scanning system		Progressive Scan
Sensor		1/3" 2Mpx CMOS
Pixels		1920(H)x1080(V)
Minimum illumination		0.08Lux/F2.0(Color,1/3s,30IRE) 0.3Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR On)
S/N ratio		> 50dB
White balance		(AWB) Auto/manual
General	Lens	2.8mm F2.0 angle of view H:110° V:56°
	Backlight compensation	BLC / HLC / D-WDR
	Shutter	Auto/manual (1/3-1/100000s),
	Gain control	(AGC) Auto/manual
	Noise reduction	3DNR Off/On - regulation
Additional	Motion detect	4 areas (regulation: size, position, sensitivity, threshold)
	Privacy masking	4 areas (regulation: size, position)
	Image rotate	Mirror, flip 90°, 180°, 270°
	Focus control	Auto
	Day/night	IR cut filter with auto-switch
	IR range	Up to 30m
Video	Compression	H.264 / H.264B / H.264H / MJPEG
	Resolution	1080P(1920x1080) / 1.3M(1280x960) / 720P(1280x720) / D1(704x576) / VGA(640x480) / CIF(352x288)
	Main stream	1080P/1.3M/720P/D1(1~25fps)
	Second stream	D1/VGA/CIF(1~25fps)
	Bitrate	H.265: 12K~6400Kbps H.264: 32K ~ 10240Kbps
Network	Ethernet	RJ-45 (10/100Base-T)
	Protocols	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPOE, IPv4/v6, QoS, UPnP, NTP, Bonjour, 802.1x, Multicast, ICMP, IGMP, easy4ip
	Compatibility	ONVIF, PSIA, CGI
	Mobile	iOS, android
	Users	Max 20 logged in
Power supply		12VDC / POE (802.3af)
Power consumption		<5W
Working environment		-30°C ~ +60°C
Weight		0.38kg
Dimensions		155x70x75mm